



Fig. 1

RSVP Messages and Parameters

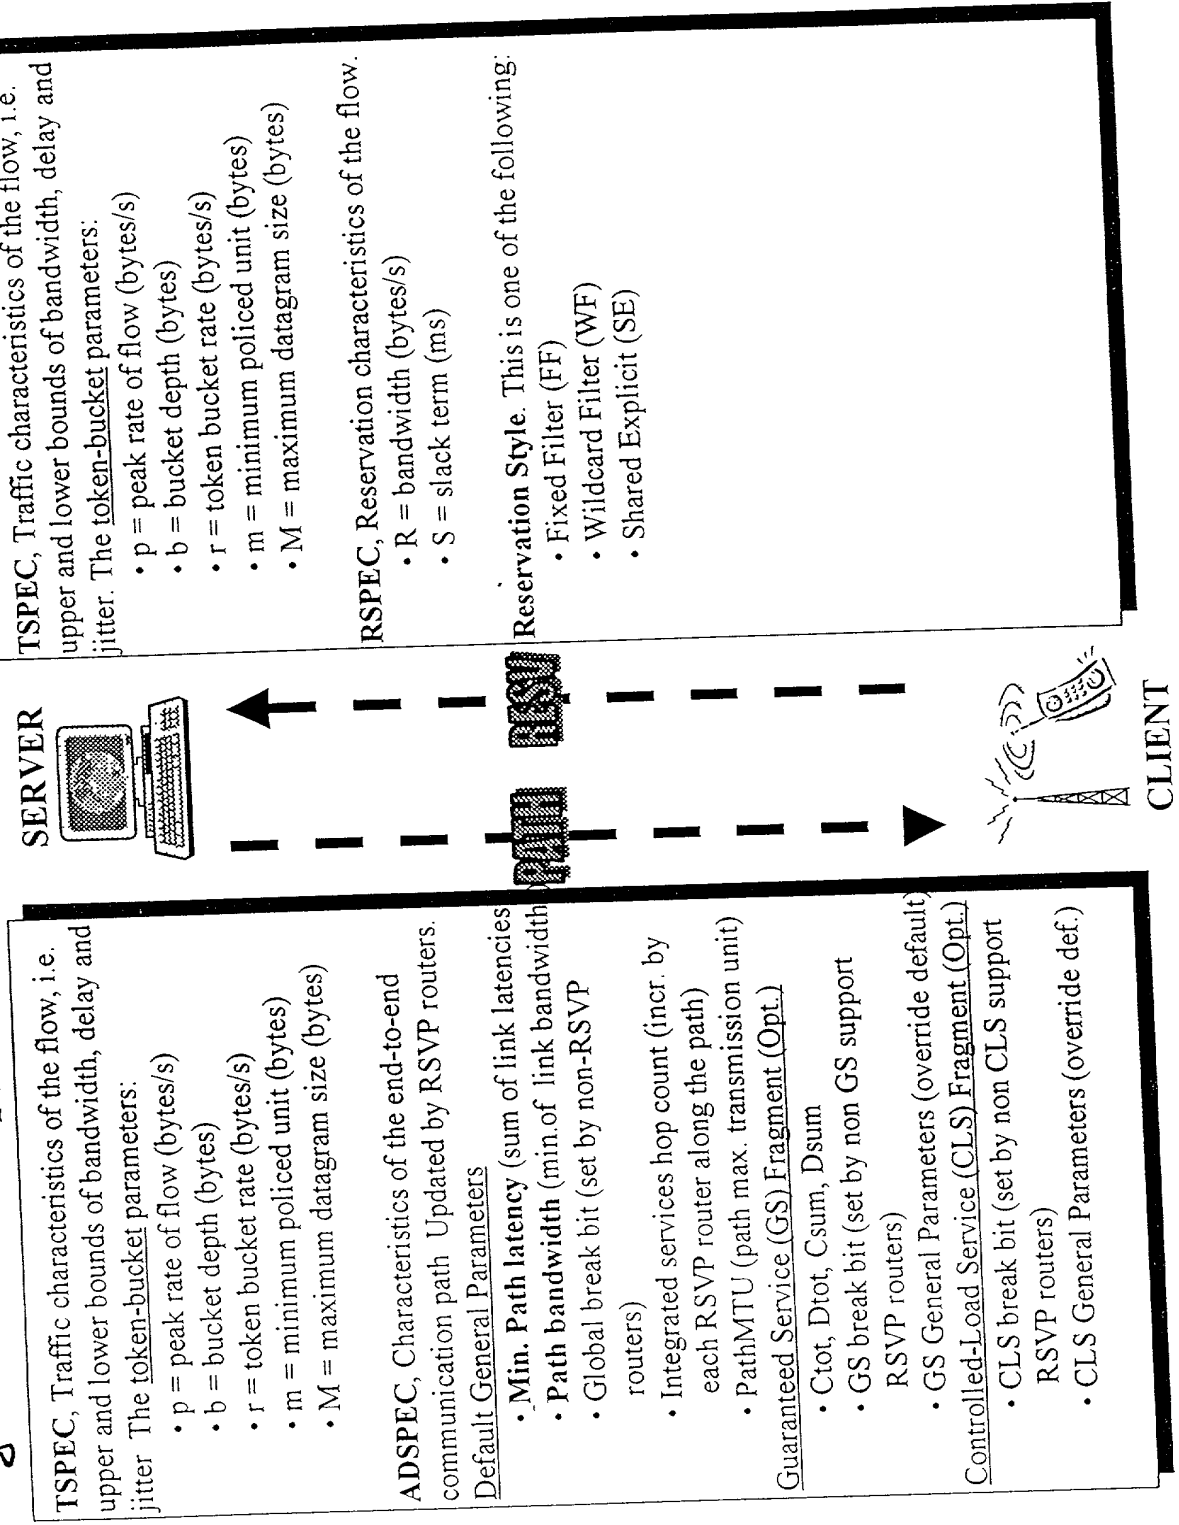

IP Multicast


Fig.2

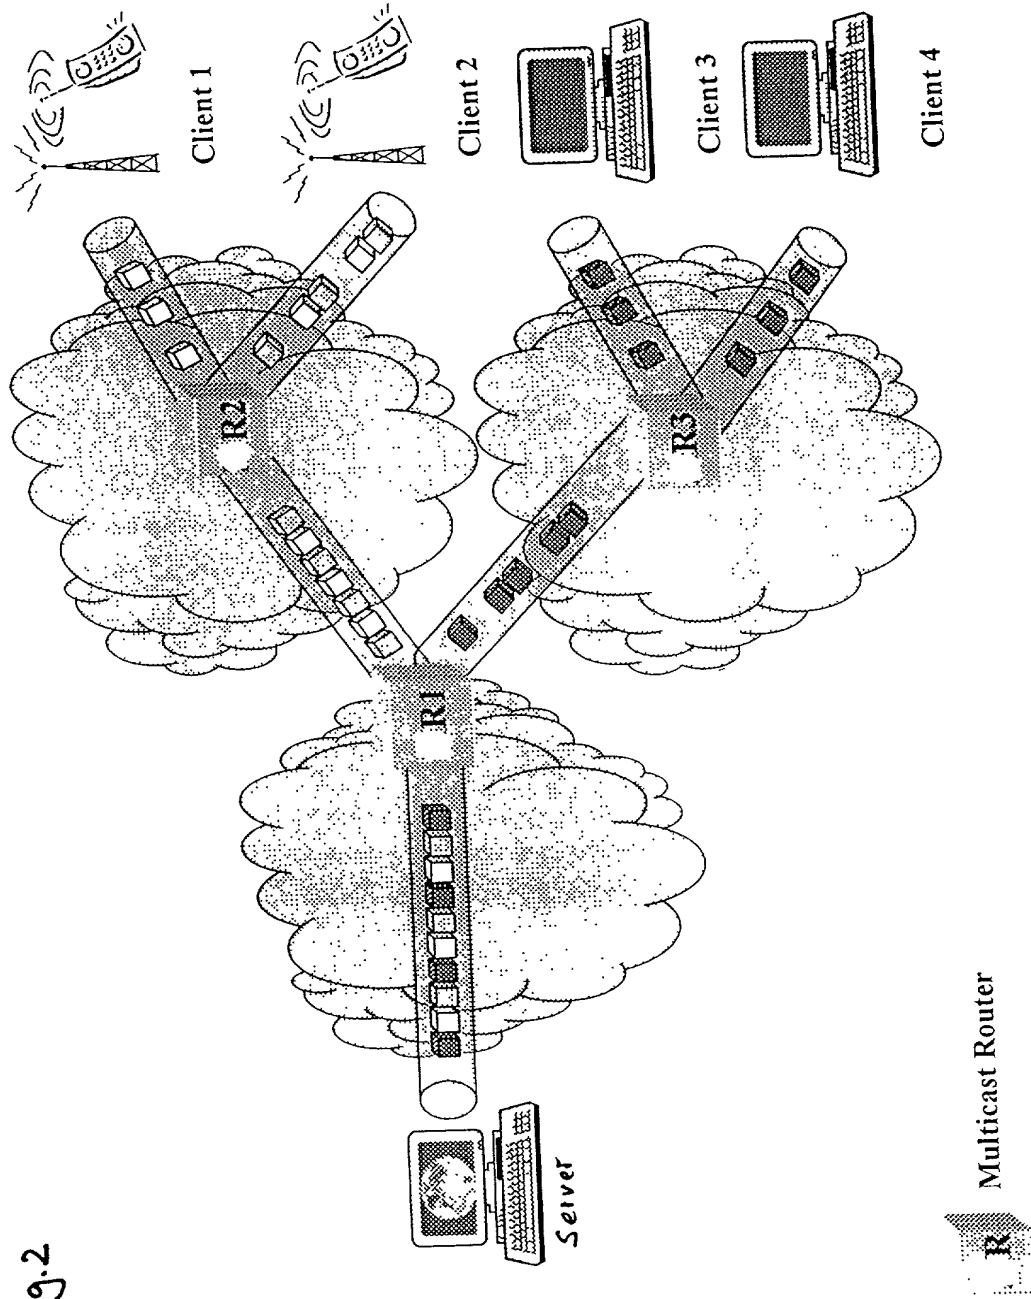

RSVP & Multicasting

Fig.3


“PATH message
Multicasting”

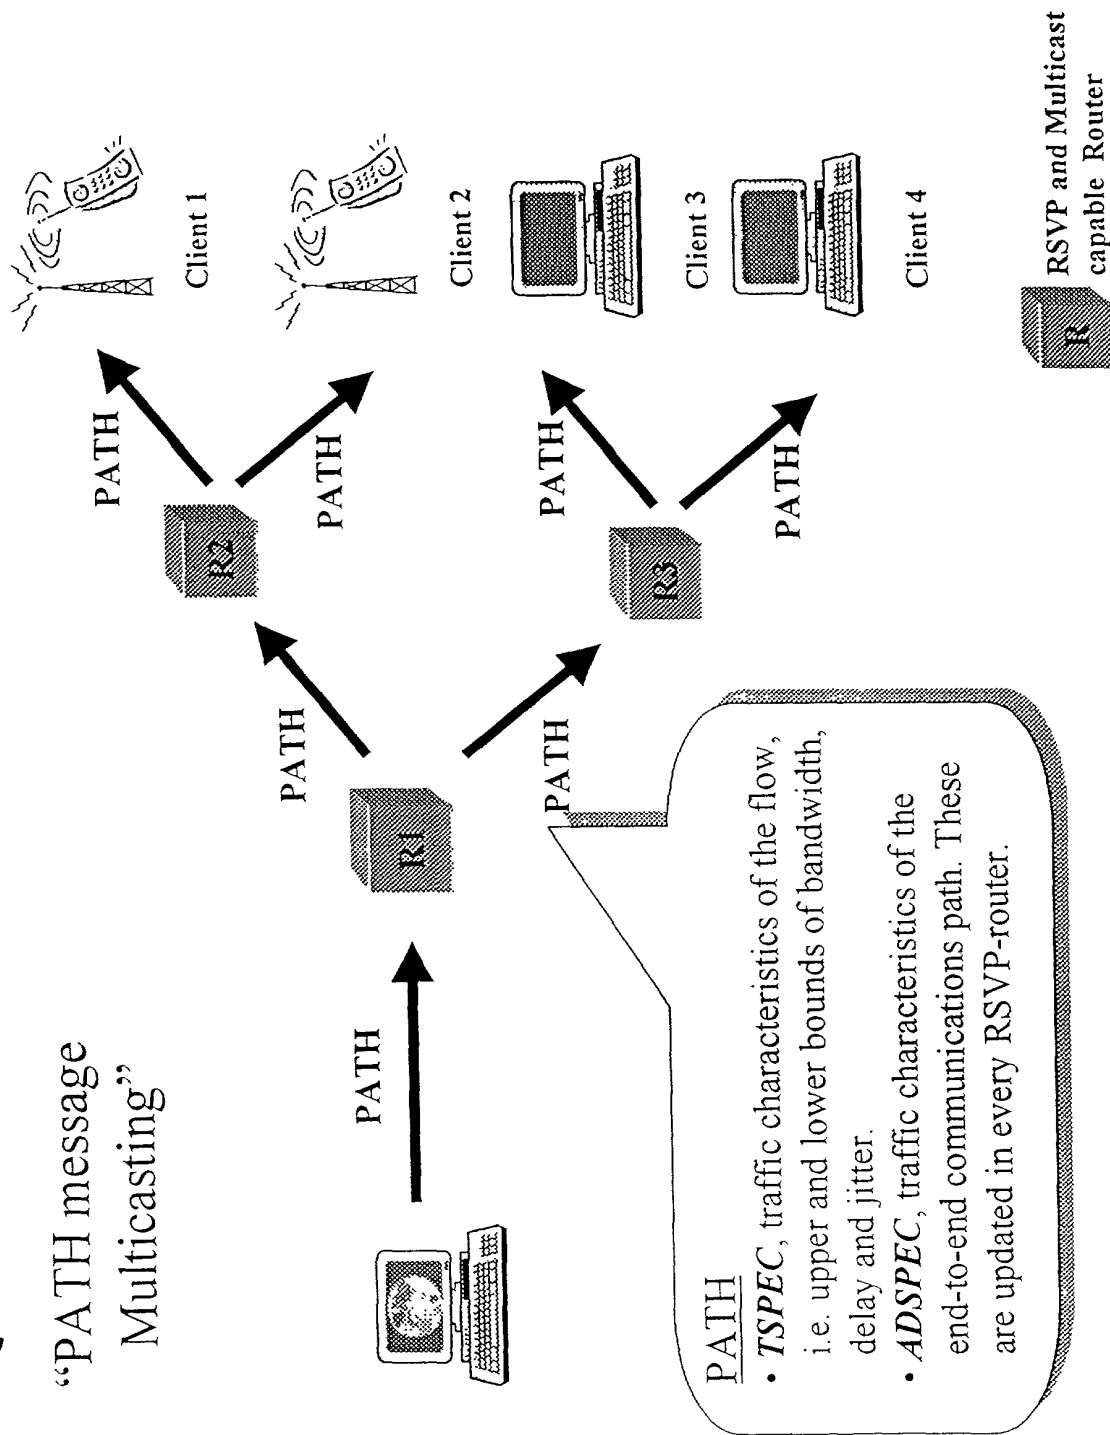

RSVP & Multicasting

Fig 4

“RESV message
inverse Multicasting”

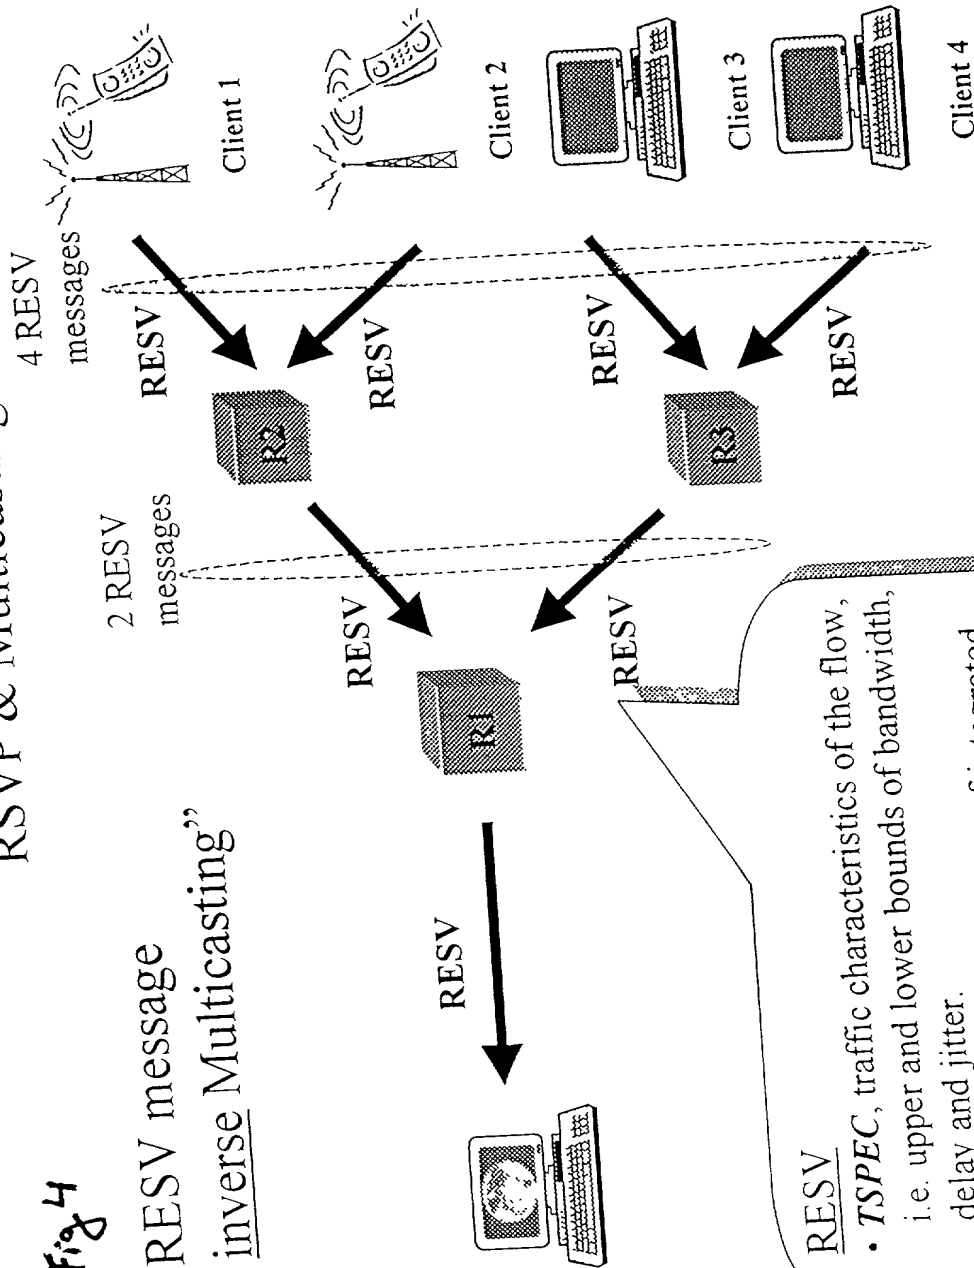


RESV

- *TSPEC*, traffic characteristics of the flow, i.e. upper and lower bounds of bandwidth, delay and jitter.
- *RSPEC*, indicates the type of integrated services required (controlled load or guaranteed).

RSVP and Multicast
capable Router


Fig. 5

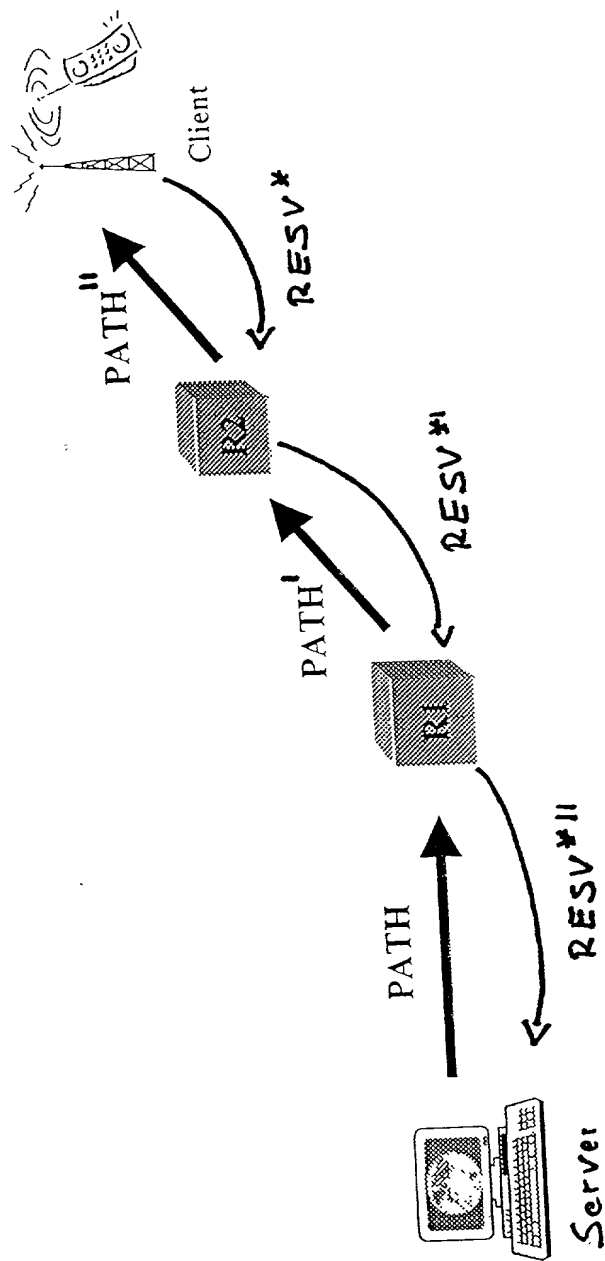

RSVP & Multicasting

Fig. 6

*
"RESV message
inverse Multicasting"

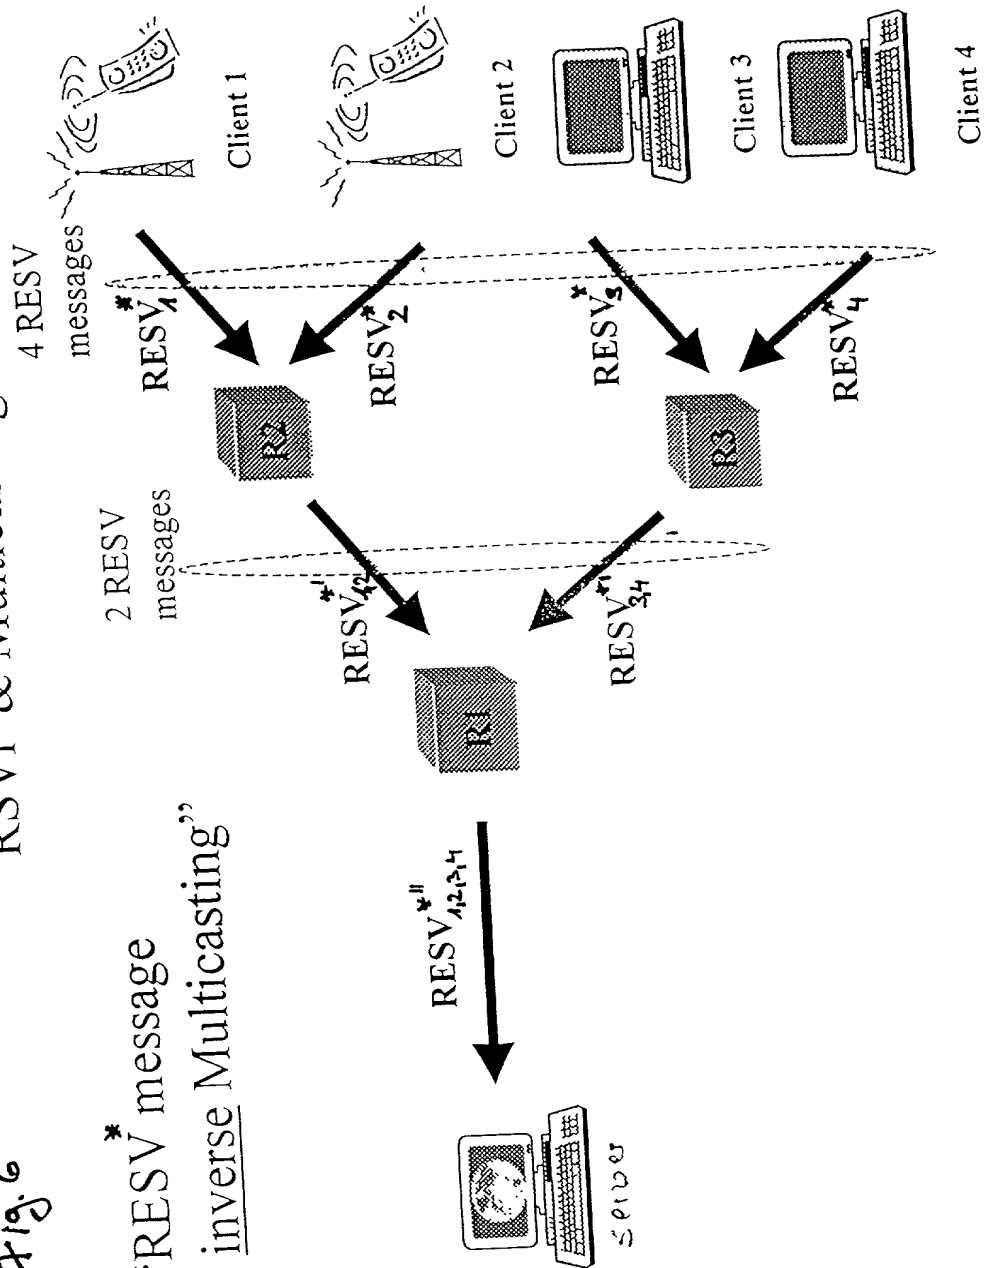

RSVP and Multicast
capable Router

Fig. 7

Pre-Reservation Mechanism

